



Contour™



BARRICADE®

Contour™ 797-50 Stretchable Window Flashing Tape

APPLICATIONS


- Excellent for flashing around window sills, interior corners of recessed windows, round top windows, and arched doorways
- Eliminates the need for corner flashing patches at window sides
- Any above-grade critical areas that need protection against air and moisture penetration

FEATURES & BENEFITS

- Consists of a butyl-based adhesive which exhibits excellent adhesion to most building materials including plywood, OSB, housewrap, concrete and most metals.
- Wide application temperature range (20° to 180°F).
- Provides a long-term weather-tight seal to prevent air, moisture, and vapor penetration.
- UV inhibitors prevent degradation for up to 1 year of direct exposure to the sun.
- Exceptional moisture resistance.
- Conforms easily to curved surfaces - forms a permanent watertight/airtight seal.
- An all-weather flashing tape - remains flexible and adheres in cold temperatures
- Available in 6" & 8" widths.
- **Contributes toward satisfying EA Credit 1 (Optimize Energy Performance) and EQ Credit 4.1 (Low Emitting Materials, Adhesives & Sealants) under LEED®.**



CONSTRUCTION

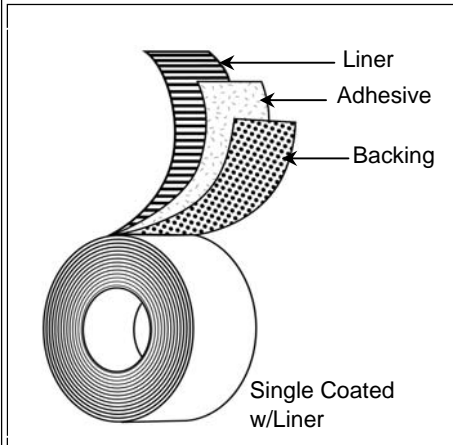

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Creped, cross-laminated Polyolefin Film

Adhesive:

- Butyl Rubber

Liner:

- Polyethylene

Colors:

- White

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	50 mils	1270.00 μ	ASTM D 1000
Adhesion Values			
Steel	>7.1 lb./in.	1.20 N/mm	PSTC-1
Plywood	>6 lb./in.	1.05 N/mm	ASTM D903-9:
OSB	>6.3 lb./in.	1.1 N/mm	
Felt	>7.4 lb./in.	1.3 N/mm	
Unprimed Brick	>7.4 lb./in.	1.3 N/mm	
Housewrap	>9.4 lb./in.	1.6 N/mm	
Extruded Vinyl	>8.7 lb./in.	1.5 N/mm	
Tensile Strength (Machine)	>295 psi	2033 kN/m2	ASTM D412-9
Tensile Strength (Cross)	>400 psi	2756 kN/m2	ASTM D412-9
Application Temperature Range	30°F to 180°F	-1°C to 82°C	
Operating Temperature Range	-30°F to 200°F	-34°C to 93°C	
VOC Content	<1 g/l		

* Rectangular specimen

** Test after 24 hour dwell time at 73°F and 50% humidity to plywood

Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.

25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nieuwlandlaan B15 Aarschot Belgium
Ph: +32(0)16/55 36 00 Fax: +32 (0)16/55 36 74
4/1/2009