



POLYKEN® 826
General Purpose Corrosion Control Tape


APPLICATIONS

- Interior and exterior corrosion protection of small diameter pipes.
- Suitable for use in below-grade applications but only in conjunction with the use of a primer such as Polyken 1027

FEATURES & BENEFITS

- Economically priced.
- Excellent conformability to irregular surfaces.
- High dielectric strength.
- Moisture resistant.
- Uniformly aggressive adhesive even at temperatures below zero.
- Excellent performance over a wide temperature range.

CONSTRUCTION

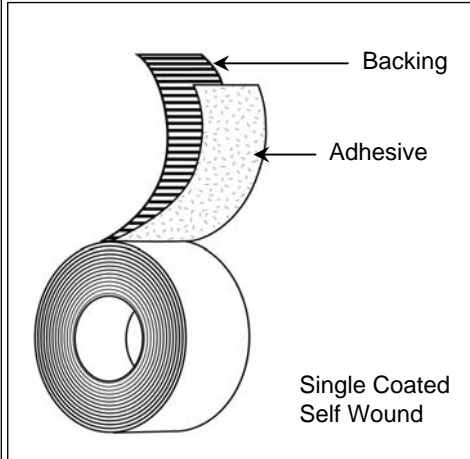

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Film

Adhesive:

- Butyl Rubber

Colors:

- Black, Yellow

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	304.80 μ	ASTM D 1000
Adhesion			
To Unprimed Steel	40 oz./in.	4.38 N/cm	PSTC-1
To Primed Steel	100 oz./in.	10.95 N/cm	PSTC-1
Tensile Strength	25 lb./in.	43.78 N/cm	ASTM D 1000
Elongation (%)	110 %		
Application Temperature	-30°F to 140°F		
Performance Temperature	-30°F to 140°F		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.