



OptiFlash™



BARRICADE® OptiFlash™ 732-20 Flashing Tape


APPLICATIONS

- Window and Door Installations
- Corner Board Abutments
- Sidewall sheathing seams
- Deck-to-wall Joints
- Sealing other detail areas against water and air penetration

FEATURES & BENEFITS

- Consists of a butyl-based adhesive which exhibits excellent adhesion to most building materials including plywood, OSB, housewrap, concrete, and most metals.
- Provides long-term weather-tight seal to prevent moisture, vapor, and air penetration.
- Kraft paper release liner for ease of application.
- Resists UV degradation for up to 1 year of direct sun exposure.
- Flexible at low temperatures; stays pliable to maintain a tight seal.
- Provides strong and immediate adhesion over a wide range of application temps (0°F-150°F).
- Compatible with sealants and caulking. Does not react with solvent-based solutions
- Woven backing provides exceptional conformability.
- **Contributes toward satisfying EA Credit 1 (Optimize Energy Performance) and EQ Credit 4.1 (Low Emitting Materials, Adhesives & Sealants) under LEED®.**

CONSTRUCTION

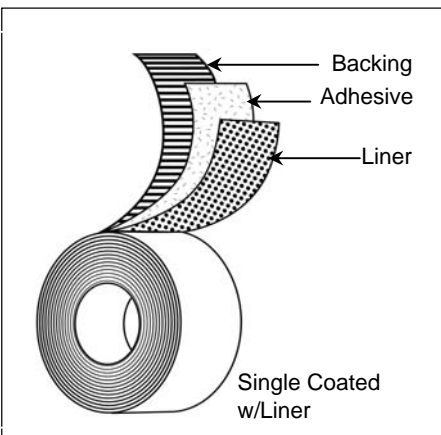

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Woven Polyethylene

Adhesive:

- Butyl Rubber

Liner:

- Release-coated Kraft Paper

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	20 mils	508.00 μ	ASTM D 1000
Backing Thickness	4 mils	101.60 μ	ASTM D 1000
Adhesive Thickness	16 mils	406.40 μ	ASTM D 1000
Adhesion Values			
Plywood	53 oz/in	5.8 N/cm	ASTM D903-93
OSB	46 oz/in	5.03 N/cm	ASTM D903-93
PVC	92 oz/in	10.07 N/cm	ASTM D903-93
Anodized Aluminum	60 oz/in	6.57 N/cm	ASTM D903-93
Tensile Strength (Machine)	60 lb/in	105 N/cm	ASTM D 1000
Application Temperature Range	0°F to 150°F	-17.8°C to 65°C	
Operating Temperature Range	-35°F to 200°F	-37°C to 93°C	

Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at Berry Plastics - Tapes & Coatings Division (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nieuwlandlaan B15 Aarschot Belgium
Ph: +32(0)16/55 36 00 Fax: +32 (0)16/55 36 74
4/1/2009