

## ThermoPly Total® 528 Sheathing Tape


### APPLICATIONS

- Sealing sheathing seams and overlaps.
- Exterior wall sheathing joints.
- Patching jobsite damage caused to fragile wall sheathings such as foam and fiberboard.

### FEATURES & BENEFITS

- UV Resistant to withstand long-term outdoor exposure.
- High performance acrylic adhesive provides long-term bond to a variety of building materials.
- Excellent performance and superior adhesion even at low temperatures.
- Aggressive tack for instantaneous bond.
- Excellent shear strength for sustained vertical hold.
- Complies with VOC requirements of SCAQMD Rule 1168.
- **Contributes toward satisfying EA Credit 1 (Optimize Energy Performance) and EQ Credit 4.1 (Low Emitting Materials, Adhesives & Sealants) under LEED®.**

### CONSTRUCTION

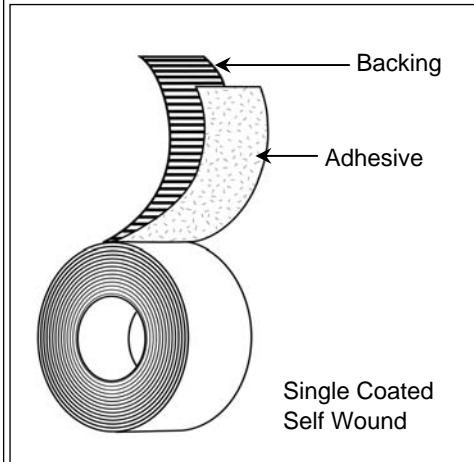

### PRODUCT DESCRIPTION

#### Single-Coated Construction

#### Backing:

- Printed BOPP Film

#### Adhesive:

- Acrylic

#### Colors:

- White w/Blue, Metallic w/Black

### TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	3.1 mils	78.700 μ	ASTM D-1000
Adhesion to Steel	22 oz./in.	2.74 N/cm	PSTC-1
Tensile Strength	34 lb./in.	49.03 N/cm	ASTM D-1000
Application Temperature	30°F - 200°F	0°C - 93°C	
Operating Temperature	-20°F - 275°F	-29°C - 150°C	
VOC Content	0 g/L		

#### Recommended storage conditions: 40-60% Humidity, 60°F-80°F

\*\*Products are not reviewed or certified under the LEED® Rating System. LEED® credit requirements cover the performance of materials in aggregate, not the performance of individual products or brands. For more information on LEED®, visit [www.usgbc.org/lee](http://www.usgbc.org/lee)

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any liability.