



Flash Right™



BARRICADE® Flash Right™

General Purpose Window Flashing Tape


APPLICATIONS

- Window and Door Installations
- Corner Board Abutments
- Sidewall sheathing seams.
- Deck-to-wall Joints
- Sealing other detail areas against water and air penetration.

FEATURES & BENEFITS

- Aggressive adhesive provides a permanent weather-tight seal on most clean, dry building surfaces.
- Strong, high-quality film provides exceptional durability.
- Protects against air and moisture penetration that can cause long-term damage and decay.
- Improves energy efficiency.
- May require primer when applying to OSB, gypsum board, or concrete.
- Suitable for up to 6 months of outdoor UV exposure.

CONSTRUCTION

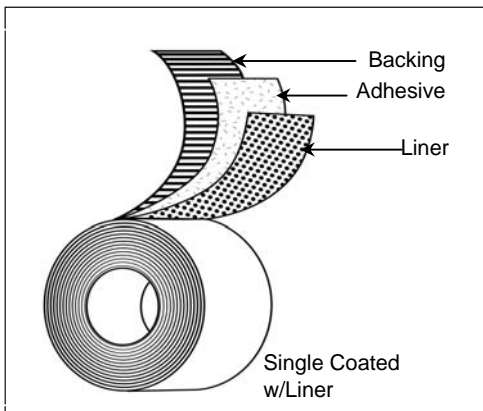

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- White Polyolefin Film

Adhesive:

- SBS Asphalt

Liner:

- Release-coated Kraft Paper

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	25 mils	635.00 μ	ASTM D 1000
Adhesion to Plywood	>7.0 lb/in	>12.25 N/cm	ASTM D1000
Tensile Strength	12.0 lb/in	21.02 N/cm	ASTM D412
WVTR	<0.02 Perms		ASTM E96
Elongation	<400%		ASTM D412
Minimum Operating Temperature	-25°F	-32°C	ASTM D146

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at Berry Plastics - Tapes & Coatings Division (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To the best of our knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nieuwlandlaan B15 Aarschot Belgium
 Ph: +32(0)16/55 36 00 Fax: +32 (0)16/55 36 74
 7/23/2009